

P40 KN R Panel


Modular panel of nominal dimension 600 x 600 mm.

Core mm 34 thick in calcium sulphate reinforced by fibres, density about 1500 kg/m³.

Top and lower side primed.

Edge trim in self-extinguishing plastic material mm 0.6 thick - available in black.

Perimetrical edge trim in plastic material is fixed through thermofusibile adhesive.

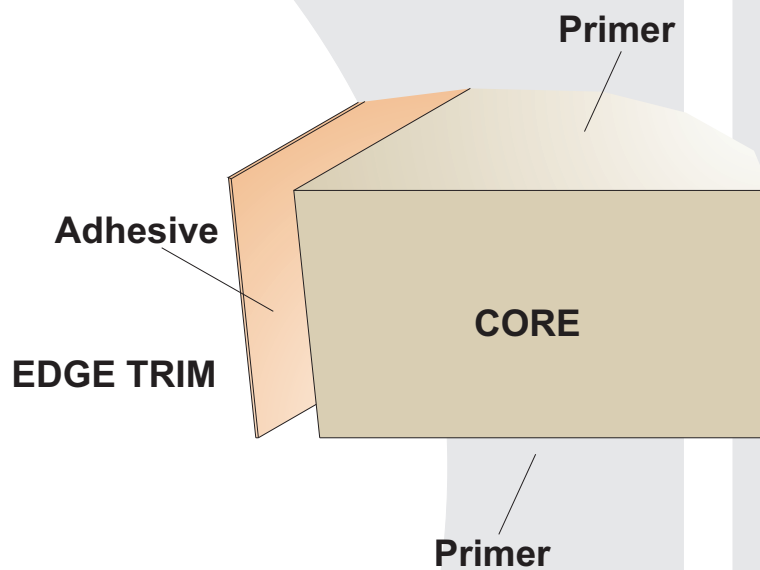

Weight:	20 - 22 kg
Panel dimensions tolerances:	+ 0.1 and - 0.2 mm
Work loads classifications: (UNI EN 12825)	Class 1A with EC-ST structure Class 3B with EC-L structure Class 3A with EC-M structure Class 4A with 8/40 G structure
Distributed load:	20 KN/m ² with EC-ST, EC-L and EC-M structures 25 KN/m ² with 8/40 G structure
Fire resistance:	Flameproof core class A1 (EN 13501-1) Fire resistance: REI 30 c.d. EN 1366-6 with EC-ST, EC-L, EC-M and 8/40 G structures Fire reaction: Class 1, B1 (DIN 4102) (*)
Noise insulation:	> 38 dB
Electrical resistance:	about 10 ⁷ OHM (*)

(*) Variable according to the coverings